**Catalogue**
FOOD SERVICE
**Chapter**
COOKING

**Model**
CP-G7226 LPG 230V 1N

19071360 09/03/2020

GAS PASTA COOKER, CP-G7226

- Surface tops manufactured in 1.5 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- 1.5 mm thick AISI-316L stainless steel wells built into the surface top.
- Wells that suit with different arrangements and measures of baskets.
- The well is filled through the inlet solenoid valve with a two-position switch: average and high-speed filling.
- Well drainage through a mechanical ball valve which is resistant to high temperatures and has a safety overflow.
- Automatic safety system to stop the current if the water runs out.
- Controls with a protective support base and system to prevent water infiltration.
- Access to components from the front.
- Stainless steel feet with adjustable height.
- Machines with IPX5 grade water protection.
- High-performance stainless-steel burner located outside of the well with a combustion chamber that enables heating of the base and sides of the well (up to the minimum filling level).
- Burner ignition through electronic spark igniter. With an access tube for manual ignition.
- Heating controlled through safety valve.
- Two wells of dimensions GN-2/3, with 26 litres capacity.
- Standard provision: Four 1/3 type baskets.

OPCIONAL ACCESSORIES
- 6 x 1/6 square baskets kit
- 6 x 1/6 round baskets kit
- 4 x ¼ baskets kit
- 2 x ½ baskets kit
"
"

**DIMENSIONS**




| | | | |
|---|---|---|---|
| X Width | 800 mm | X Gross width | 840 mm |
| Y Depth | 730 mm | Y Gross depth | 822 mm |
| Z Height | 850 mm | Z Gross height | 1255 mm |
| Net Weight | 89,0 kg | Gross Weight | 107,0 kg |
| Net volume | 0,500 m3 | Gross volume | 0,867 m3 |

**ELECTRICITY TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Electric power | 0,100 kW |
| Amperage (A) | 2A |
| Voltage | 230V - 1N |
| Electric frequency | 50/60Hz |

**GAS TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Gas type | LPG |
| Gas power | 20,00 kW |
| Gas consumption | 1,576 kg/h |
| Regulated | LPG G30/G31 28-30/37 mbar |
| | NG G20/G25/G25.1 20/25/25 mbar |

**WATER TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Pressure | H2O: 200-400kPa(2-4bar) |
| Water max consumption | 0,00 L/h |

**CONNECTIONS TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Gas diameter 1 | R.3/4"G |
| Water inlet diameter | 3/4" |

Catalogue
**FOOD SERVICE**

Chapter
**COOKING**

Model
**CP-G7226 LPG 230V 1N**

19071360 09/03/2020

## CP-G7126

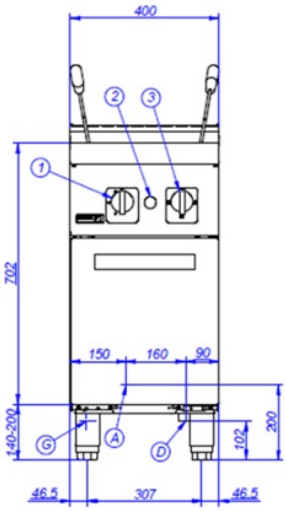


## CP-G7226

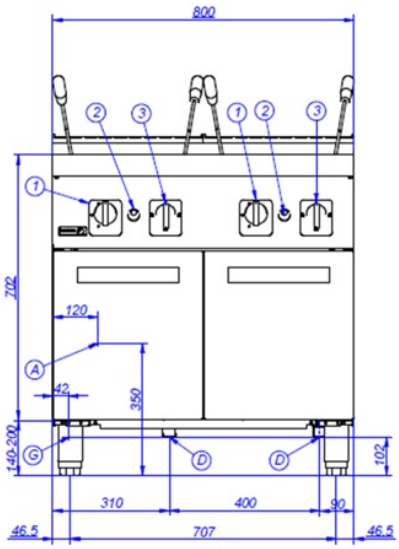


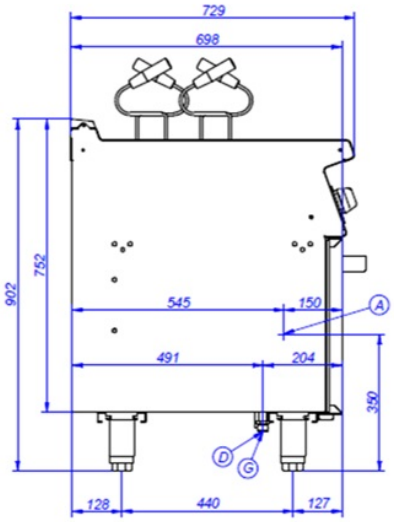


A – Entrada de Agua
G – Entrada de Gas
D – Desagüe
1 – Grifo válvula de gas
2 – Pulsador piezoeléctrico
3 – Grifo de entrada de agua

Water Inlet
Gas Inlet
Drainage
Gas valve tap
Piezoelectric ignitor
Water inlet tap

Arrivée d'eau
Entrée de gaz
Vidange
Robinet vanne gaz
Allumeur piézoélectrique
Commande d'entrée d'eau