Catalogue
FOOD SERVICE
Chapter
COOKING

Model
B-G9051 LPG 230V 1N

19075476 28/02/2020

GAS GRILL, B-G9051

- Deep-drawn cooktops manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- Cast iron grills which can be removed without tools, 170 mm-wide sections.
- The iron grills are reversible with different finishes on each side:
· Tilted and grooved with ridges for meat.
· Horizontal and flat for fish and vegetables.
- These grills reach a very high temperature (400 ºC), meaning that the surface of the product is quickly sealed and inside it remains much juicier.
- Fitted with an opening to collect cooking grease and a tray to store up to 12 litres (one tray for half-module machines, two trays for whole-module machines).
- It is possible to put water in the grease trays and, thanks to the radiation of heat from gas burners or electrical elements, a low intensity steam is produced and grilling can be carried out in a steam environment.
- Machines are fitted with removable 130 mm high guards to prevent splashes, made of stainless steel.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Stainless steel feet with adjustable height.
- Machines with IPX5 grade water protection.
- Burner ignition through electronic spark igniter. With an access tube for manual ignition.
- Spark ignition
- Groups of three high-efficiency tubular burners with radiation deflector (one group of three burners for half-module models and two groups for whole-module models).
- Independent control for each group of burners through a safety valve with thermocouple.
OPTIONAL ACCESSORIES
- Special scraper for cast iron grill.
"
"

DIMENSIONS



X Width	400 mm	X Gross width	440 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	850 mm	Z Gross height	1255 mm
Net Weight	67,0 kg	Gross Weight	80,0 kg
Net volume	0,134 m3	Gross volume	0,564 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,100 kW
Amperage (A)	2A
Voltage	230V - 1N
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	LPG
Gas power	11,00 kW
Gas consumption	0,850 kg/h
Regulated	LPG G30/G31 28-30/37 mbar
	NG G20/G25/G25.1 20/25/25 mbar

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1,5+T
Gas diameter 1	'R.3/4"G'

Catalogue
FOOD SERVICE

Chapter
COOKING

Model
B-G9051 LPG 230V 1N

19075476 28/02/2020

B-G9051

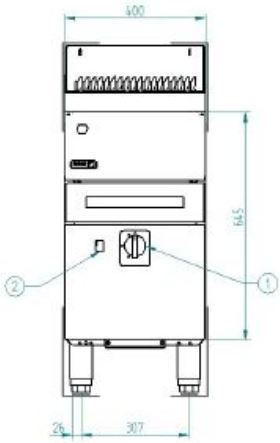

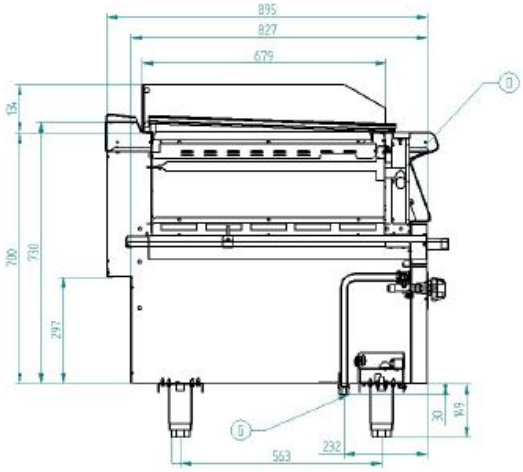

B-G9101

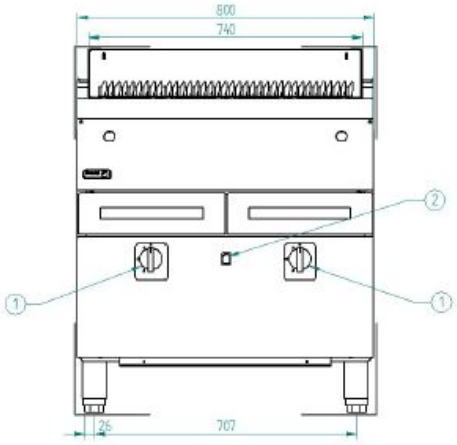

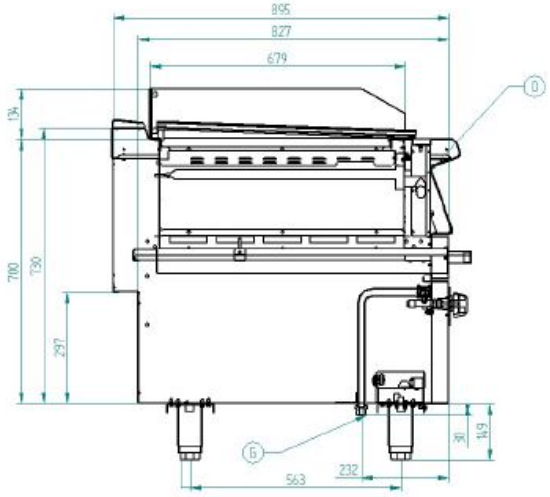

G – Entrada de Gas	Gas Inlet
D – Desagüe	Drainage
1 – Grifo válvula de gas	Gas valve tap
2 – Pulsador tren de chispas	Piezoelectric ignitor